

Fieldmate™


Fieldmate X-Strap for the Dell Latitude 7220 Rugged Extreme Tablet



Introduction


Your Fieldmate X-Strap is uniquely designed to provide ease in transportation and utilization of your Dell Latitude 7220 and all of its added features.

Features

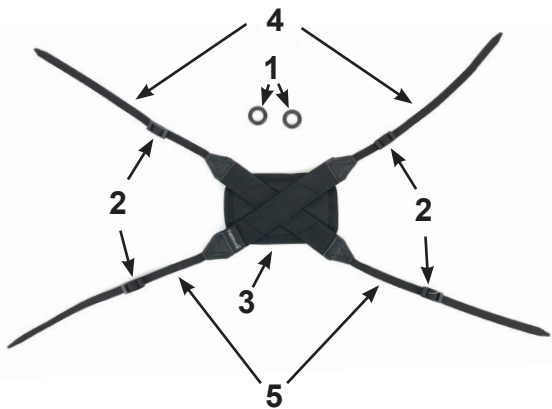

- 1) O-Rings
- 2) Webbing Glides
- 3) Hand Pad
- 4) Top Nylon Webbing Straps
- 5) Bottom Nylon Webbing Straps

1

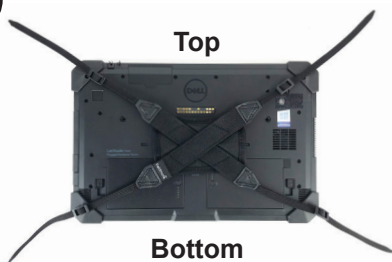

Before installation, make sure your device is laid face down on a soft, clean, surface. Align the Nylon Webbing Straps (4+5) to the slots that they will feed through (as seen to the left). Make sure the Top Webbing Straps (4) align with the top loops while the Bottom Webbing Straps align with the bottom loops (5) (see image for details)

2

To install the Webbing Straps (4+5), insert the end of the strap into one of the slots that are built into the device. Push the strap through and when the end emerges from the other side of the slot, pull the strap through. Note: Pliers may be needed to feed webbing straps through the device slot.



3



Follow Step 2 for all four slots to ensure that the Hand Pad (3) is centered properly on the device.

4

For attachment of optional shoulder strap, add two O-Rings (1) to two of the corners for attachment points. Shoulder strap can attach for “portrait” or “landscape” viewing based off O-Ring placement.



5

Loop the Webbing Straps (4+5) back through the Webbing Glides (2). This ensures a tight connection to the device that will support use of accessories.



6

The Webbing Strap (4+5) will be looped through the Webbing Glide (2) a third time. For easy installation, pull the Webbing Glide (2) upward and feed the strap through the opening. Pull strap through tightly. Repeat Steps 5 and 6 for all four corners.



Warning: For a secure connection to be created, the Webbing Straps (4+5) must loop through the Webbing Glides(2) three times as shown.

Tips for use

1. The O-Rings (1) are designed to allow the attachment of the optional Shoulder Strap or accessories to provide an enhanced user experience for the device.
2. With the X-Strap installed, you will still have the ability to swap batteries.
3. If you would like to clean the Havis X-Strap, it is machine washable. Please remove and store all tri-glides and O-rings before washing. Machine wash cold, air dry only, do not bleach, do not iron. Attach tri-glides and O-rings after cleaning.



Warranty

InfoCase products are dynamic, consistently improved and reinvented to bring you the best products on the market. We use only the highest quality materials to meet your mobile technology demands.

InfoCase offers a warranty on defects and workmanship on this product. Please visit: <http://www.InfoCase.com/warranty> or call 1-800-248-4844 to obtain more information on the InfoCase warranty.